

6236A



SOFT SERVE FREEZER

Single flavor, Countertop, Pump feed,
Microprocessor control

Product Offering

Offer all popular soft serve variations from low or non-fat ice cream to custards, yogurt and sorbet

Freezing Cylinder

One, 3.2 Liter (3.38 quarts)

Mix Hopper

One, 10 Liters (10.6 quarts)

Separate hopper refrigeration maintains mix temperature below 4.4°C (40°F) during Cool and Standby modes.

Mix Low Indicator

When mix level is low, the Mix Low light turns "ON" to alert operator to add mix.

Standby

Maintains product temperature in the mix hoppers and freezing cylinders below 4.4°C (40°F) during long no-use periods.

Microprocessor Controls

Automatically regulates refrigeration by monitoring product viscosity to maintain consistent quality.

Counter

Records number of dispenses per day and total number of dispenses.

Temperature Display

Displays hopper and cylinder temperature; helps control product safety.

Output

420 Cups/Hour
(80 gram/cup at 4°C Liquid & 24°C Ambient)

Safety Protections

- Low temperature and motor overload cutouts protect from cylinder over freezing.
- High pressure switch prevent compressor overheat.
- Thermal overload protect from motor overheat.



Selected 60
Hz. Models



50 Hz.
Models



Flexible blade beater
Higher capacity, higher overrun



MODEL 6236A

SPACEMAN ICE SYSTEMS (HK) CO, LIMITED

FACTORY: YUANYI RD, INDUSTRY PARK, SANQISHI TOWN, YUYAO, ZHEJIANG, CHINA 315412


PHONE: +86 574 62953030

FAX: +86 574 62951664

www.spaceman-company.com

Email: info@spaceman-company.com

ISO 9001: 2008
Registered Firm

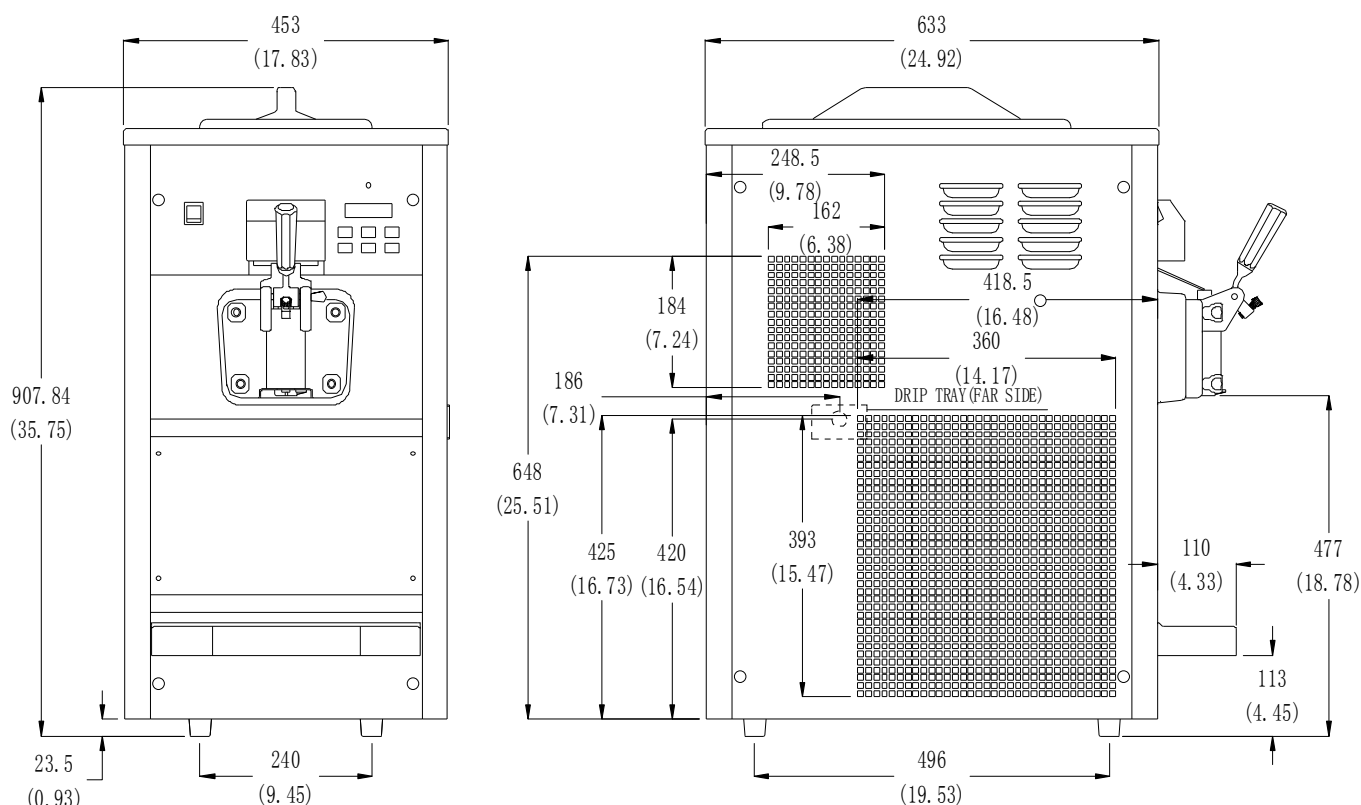

| Weight | Kg / lb |
|----------|-------------|
| Net | 135 / 297.6 |
| Shipping | 150 / 330.7 |

Packaging Volume 0.463 CBM / 16.36 CBF

| Dimensions | Net (mm/in) | Shipping (mm/in) |
|------------|-------------|------------------|
| Width | 453 / 17.8 | 510 / 20.1 |
| Depth | 633 / 24.9 | 845 / 33.3 |
| Height | 908 / 35.7 | 1075 / 42.3 |

| Electrical | Maximum Fuse Size | Min. Circuit Ampacity | Poles (P) Wires(W) |
|------------|-------------------|-----------------------|--------------------|
| 220/50/1 | 20 | 16 | / 3W |
| 220/60/1 | 24 | 18 | / 3W |

*This unit may be manufactured in other electrical characteristics. Refer to the local Distributor for availability.
(For exact electrical information, always refer to the data label of the unit.)*

Note

Continuing research results in steady improvements; therefore these specifications are subject to change without notice.

Specifications

Electrical

One dedicated electrical connection is required. Unit shall be cord connected or permanently connected. Consult your local Spaceman distributor for available cord & receptacle specifications as per local codes.

Motor

One, 1.25HP

Refrigeration System

Main Compressor: One, 5500 BTU/HR, R404A

Separate Hopper Cooling Compressor:

One, 480 BTU/HR, R134A

(BTUs may vary depending on compressor used.)

Air Cooled

Minimum clearance of 152mm (6") on both sides is required to achieve optimum performance. It is recommended to place the rear of the unit against the wall.

Options

- Top Air Discharge Chute (air cooled only).
- Water Cooled.
- Local language Control systems: English, French, Spanish, German, Dutch, Czech, Chinese.
- Cone dispenser